


FIG. 1

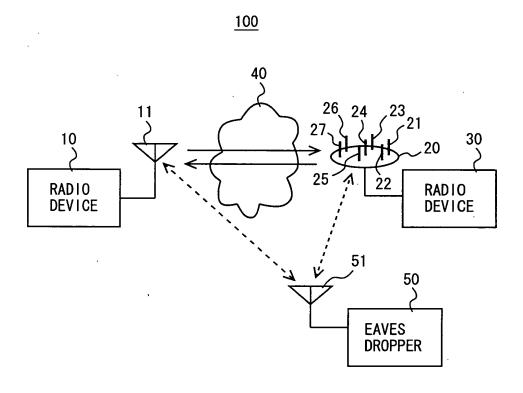


F I G. 2

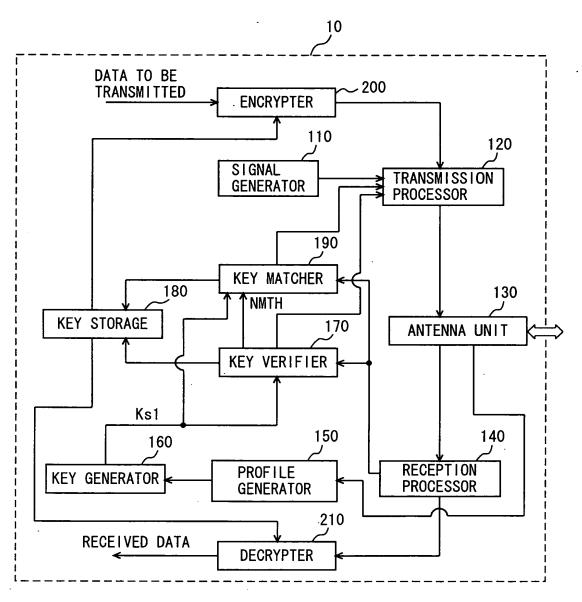



F I G. 3

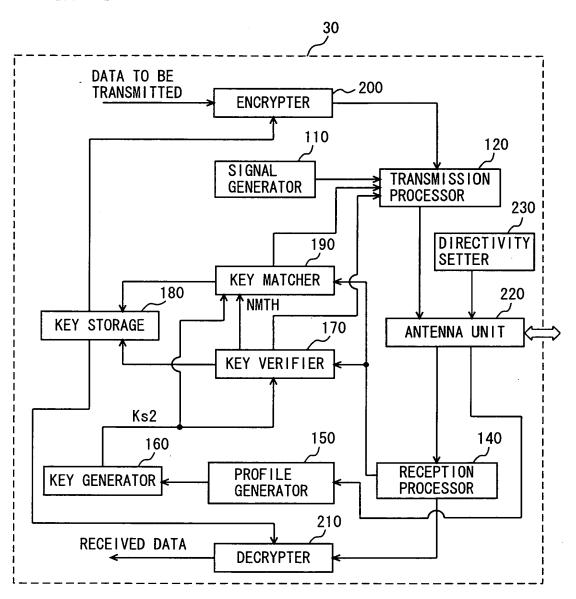

F I G. 4




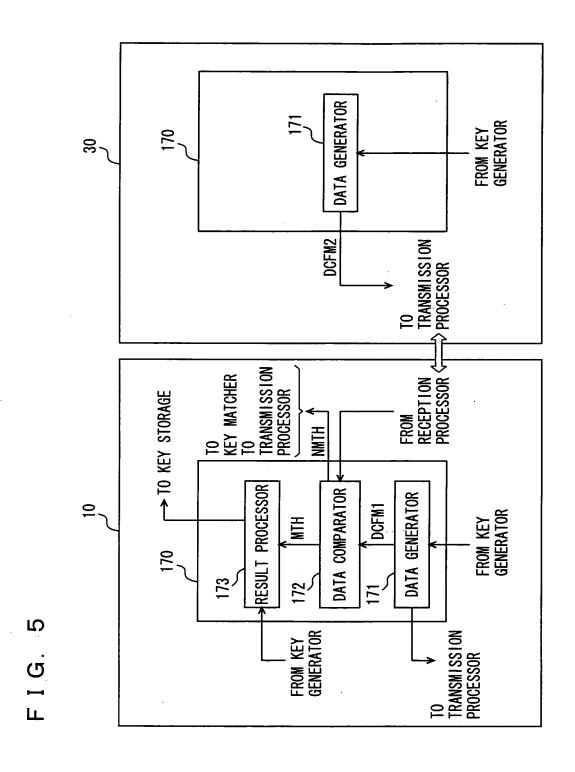


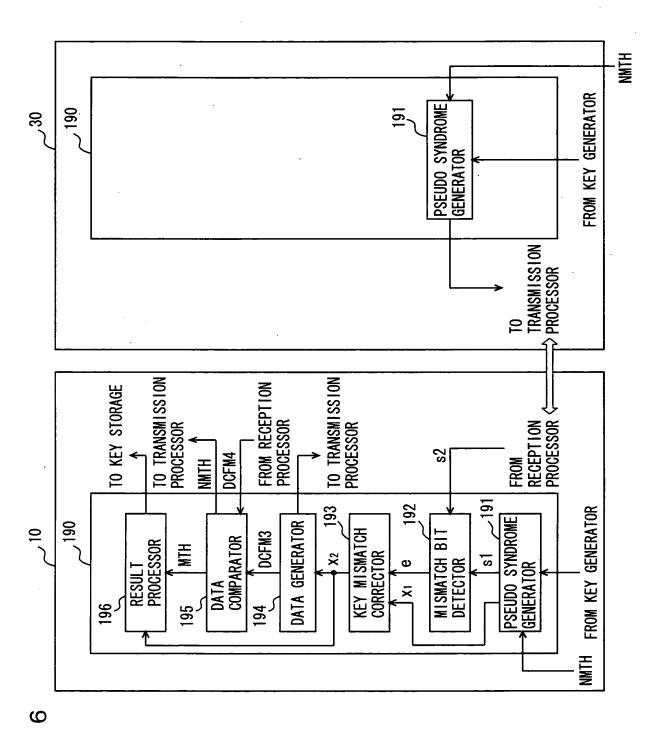

F I G.

F I G. 7

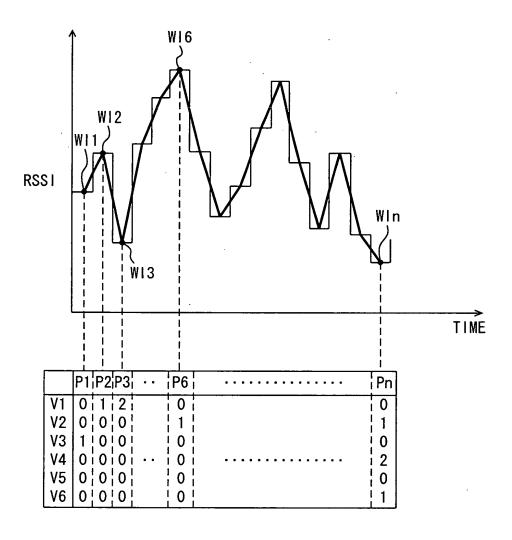

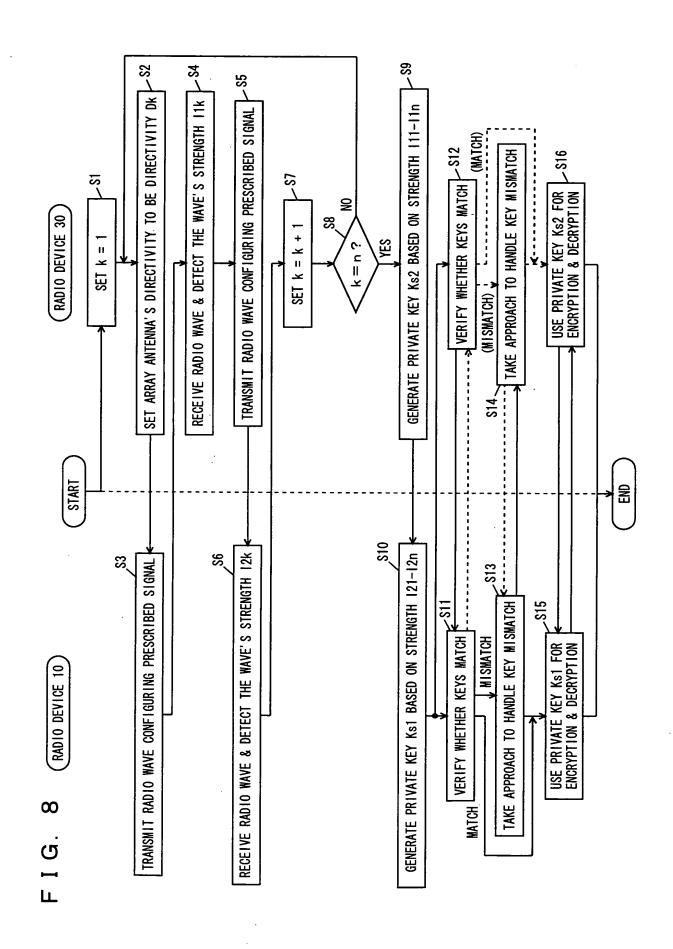

F I G. 9



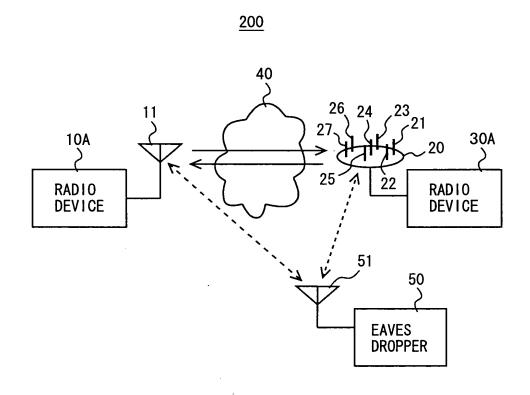



FIG. 10

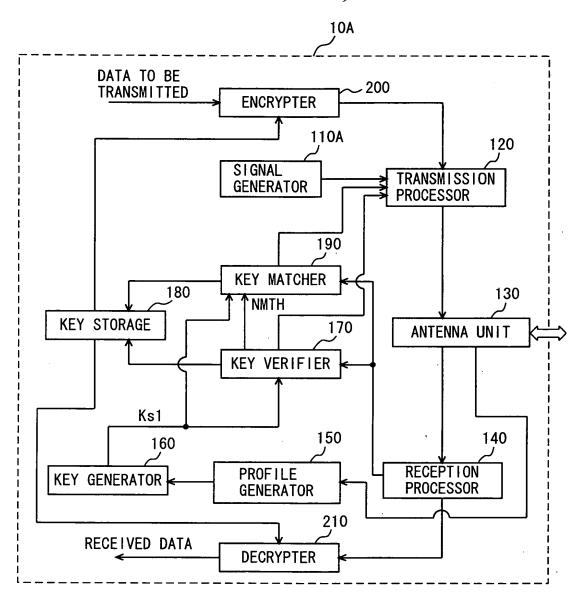

F I G. 11

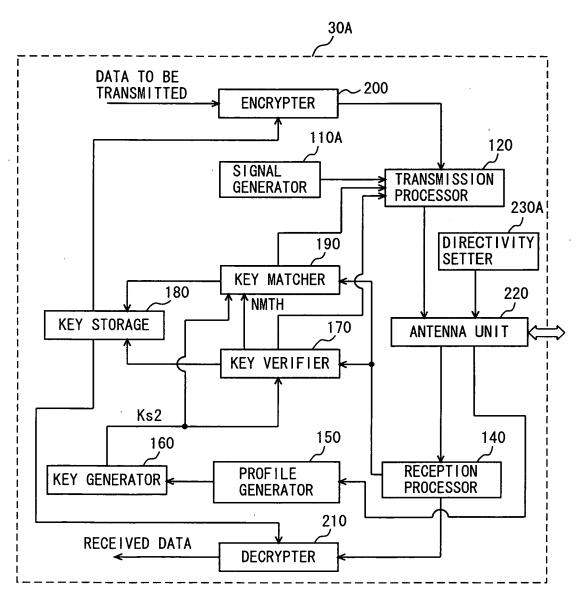

F I G. 12



MAC LAYER PSDU ≧48bit CRC 16bit OMNIPATTERN T5 SFD SIGNAL SERVICE LENGTH 16bit 8bit 8bit 16bit PLCP HEADER 116it PHYSICAL LAYER DIRECTIVITY PATTERN 74 121bit 23 PLCP PREAMBLE 07 SYNC 128bit Ξ OMNI-PATTERN DO 36bit 13

FIG. 13

FIG. 14

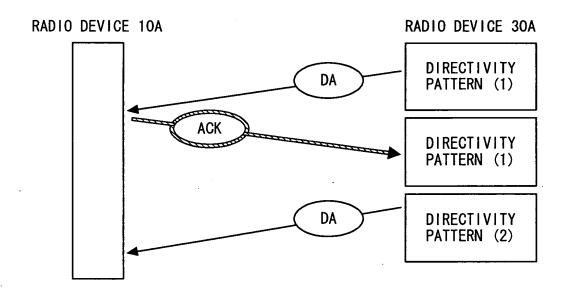


FIG. 15



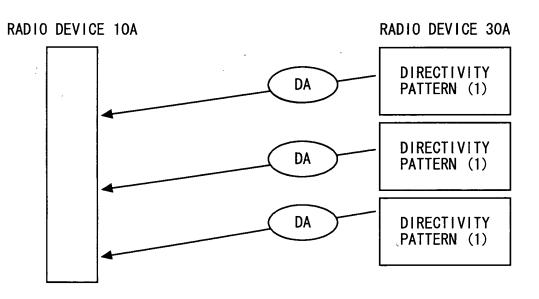


FIG. 16

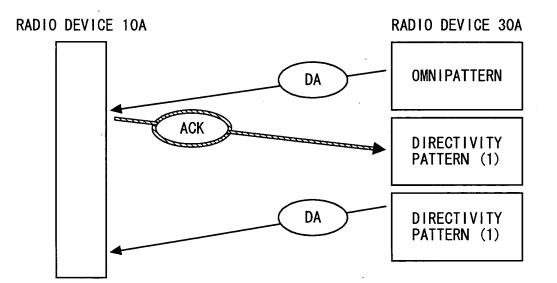

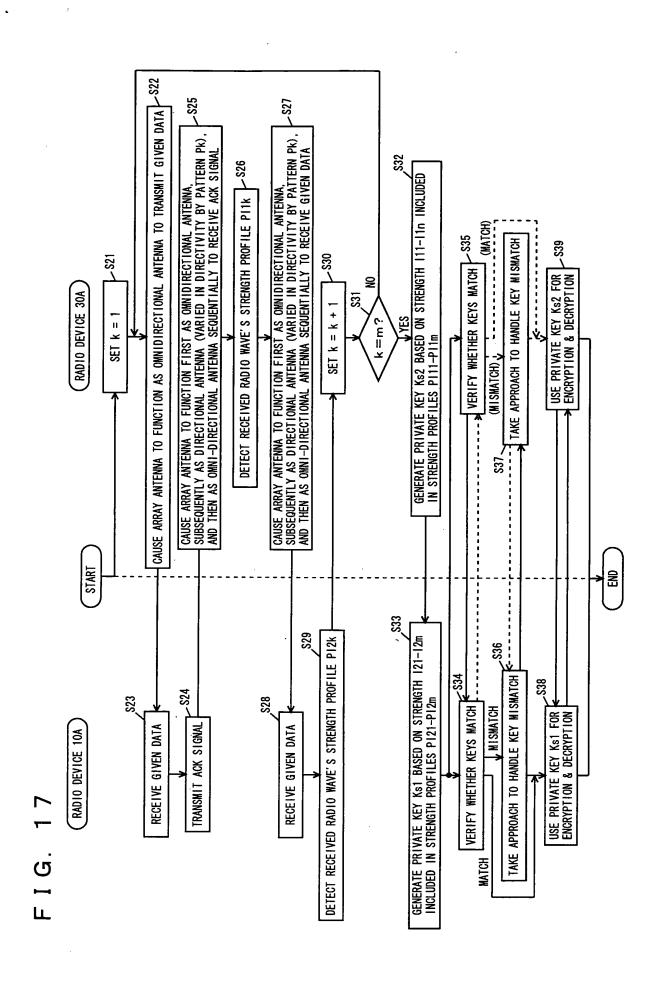

: